




WV-1A2P1A

2200mm Gas Fo San Wok & Pots



Specifications

- NAT Gas: 290 MJ/h, LP Gas: 290 MJ/h
- Gas regulator built into gas train
- Gas Inlet: 3/4" BSP Male
- Gas #1: 300mm from Left, 100mm from Rear, 215mm from Floor
- Gas #2: 1750mm from Left, 100mm from Rear, 215mm from Floor
- Water Inlet: 1/2" BSP Male
- Water #1: 530mm from Left, 100mm from Rear, 205mm from Floor
- Water #2: 1980mm from Left, 100mm from Rear, 205mm from Floor
- Drain: 2" Pipe
- 120mm from Left, 170mm from Rear, 570mm from Floor
- Electrical Input rated at 220-240V, 10A, 50Hz, 150W
- Electrical Input #1: 175mm from Left, 205mm from Floor
- Electrical Input #1: 2150mm from Left, 205mm from Floor
- Length of cables on rear: 600mm
- Working Height: 800mm
- Dimensions: 2200 x 900 x 1300H @ 375kg
- Packed Dimensions: 2260 x 950 x 1470H @ 420kg
- Heavy duty construction with 304 stainless steel panels
- Stainless steel feet with 55mm height adjustment range

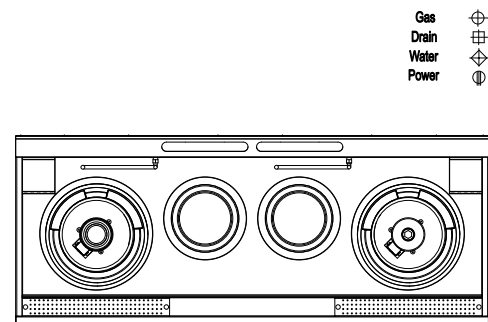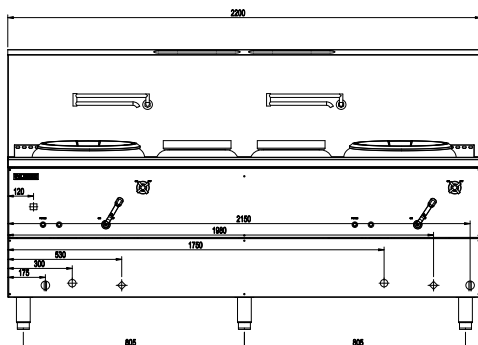

Gas
Drain
Water
Power

Gas Fo San Wok

- 145 MJ/h Air-Blast Burner with 3 MJ/h pilots & FFD Standard
- Electronic auto-ignition switch and burner reset function
- Fan-Forced stainless steel burner easy-to-clean design
- External pilot position most effective at avoiding blockages
- Fire-brick lined combustion chamber and ceramic base
- Rear flue system provides effective & efficient combustion
- Supplied with 2 x 8L soup pot
- Quarter turn water control lever
- Folding rear laundry arm with front panel controls
- Front gutter design for easier cleaning
- Internal front heat shield panel
- Supplied with waste strainers
- Zinc-aluminium alloy burner handles
- Burner handle can be positioned at 45° orientations to match personal preference

Cleaning & Servicing

- Front gutter design and waste strainer for easier cleaning
- Top surface and skirting are easy to clean from above
- Burner removable and accessible from above
- Burner injector, electrode and flame probe accessible
- Control box accessible via lower front cover
- Drain and tap accessible by removing upper front cover
- Gas train, air-line, fan and burner easily accessible from front

Options/Accessories

- Rear Castors (rigid)
- Front Castors (swivel with brakes)
- Joining caps & strips
- LH & RH side shields
- 250mm wide clip-on shelves (front)
- Lowered splashback to 1100mm overall height

Warranty

- 1 Year Included + 1 Year Extendable upon registration

Must be installed by an authorised person in accordance with AS/NZS 3000 & AS/NZS 5601

Please note that specifications or design may be altered at any time without notice

Luus Industries Pty Ltd | +61 3 9240 6822 | sales@luus.com.au | www.luus.com.au

