




SCM-120

1200mm Gas Auto-Refill 3 Tier Steam Cabinet



Specifications

- NAT Gas: 200 MJ/h, LP Gas: 200 MJ/h
- Supplied with gas regulator (specify NAT or LP on order)
- Gas Inlet: 3/4" BSP Female
- 175mm from Left, 674mm from Rear, 137mm from Floor
- Water Inlet: 1/2" Stainless steel corrugated tube
- 85mm from Left, 674mm from Rear, 182mm from Floor
- 15mm non-return isolation valve
- Main Drain: 1-3/4" BSP Female
- 650mm from Left, 387mm from Rear, 123mm from Floor
- Overflow Drain: 1-1/2" BSP Male
- 75mm from Left, 410mm from Rear, 170mm from Floor
- Dimensions: 1200 x 900 x 1890H @ 385kg
- Packed Dimensions: 1300 x 1000 x 2100H @ 405kg
- Heavy duty construction with 304 stainless steel panels
- Stainless steel feet with 55mm height adjustment range

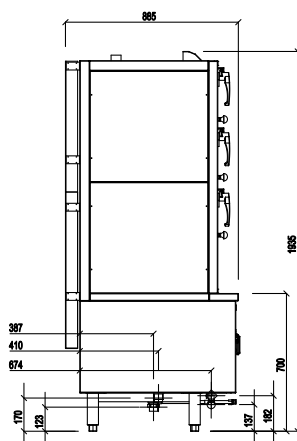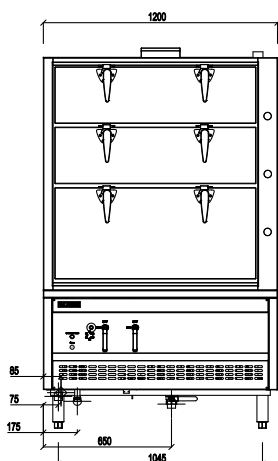

Must be installed by an authorised person in accordance with AS/NZS 5601

Please note that specifications or design may be altered at any time without notice

Luus Industries Pty Ltd | +61 3 9240 6822 | sales@luus.com.au | www.luus.com.au

Auto-Refill Steam Cabinet

- 200 MJ/h flame thrower burner with pilot, FFD and electrical piezo
- In-built auto-refill mechanism with stainless steel float
- Insulated heat exchange system
- Pressure release valve installed
- Stainless steel external construction
- Three stop rotary door lock system with polyester handles

Cleaning & Servicing

- Easy access to all parts & compartments from front

Warranty

- 1 Year Included + 1 Year Extendable upon registration

