

EAN-60

600mm 6 Basket Auto Lift Induction Noodle Cooker



INDUCTION

Specification

- Power Ratings: 15kW, 20.9A, 50Hz
- 3 Phase Electrical Connection
- Hard wired or fit cable and plug (not supplied)
- 180mm from Left, 34mm from Rear, 520mm from Floor
- Water Inlet: 1/2" threaded BSP male
- 300mm from Left, 30mm from Rear, 905mm from Floor
- Drain: 2" BSP Male
- 160mm from Left, 130mm from Front, 100mm from Floor
- Protection Ratings: IPX4
- Working height: 850mm
- Dimensions: 600 x 750 x 1340H @ 75kg
- Packed Dimensions: 640 x 860 x 1470H @ 85kg

Features

- Suitable for cooking high volumes of noodles
- Comes to a rolling boil in 9 mins and recovers heat efficiently
- Fast and powerful with instant heat transfer to tank
- Effortlessly lower baskets with a single button press
- Baskets automatically rise based on custom timer settings
- Built-in overflow system with manual water refill
- Lower Ambient heat for a more comfortable kitchen
- High quality engineering and craftsmanship throughout
- 90%+ thermal efficiency results in lower energy costs
- Safer than gas with zero carbon emissions or combustion
- High temperature/empty tank safety mechanism
- AISI grade stainless used on all external panels
- Isolated bottom ensures user safety at all times

Auto Lift Induction Noodle Cooker


- 15kW rapid induction high-frequency coil technology
- 6 Programmable precision timer control for auto lift
- Standard rotary knob with variable heat settings (8 levels)
- Water-fill laundry arm on splashback
- Supplied with 6 baskets

Cleaning & Servicing

- Easy access to all parts and components from front
- Removable baskets and tank filter

Warranty

- 1 Year Included + 1 Year Extendable upon registration

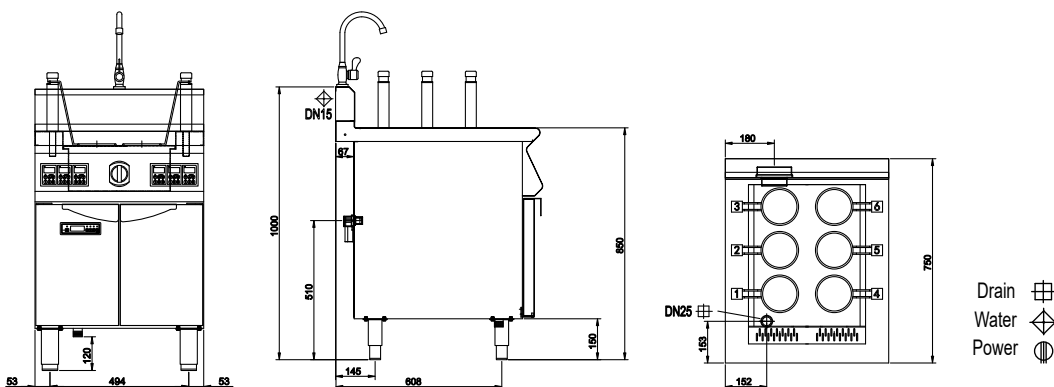

Must be installed by an authorised person in accordance with AS/NZS 3000.

Please note that specifications or design may be altered at any time without notice.

Luus Industries Pty Ltd | +61 3 9240 6822 | sales@luus.com.au | www.luus.com.au

